

SUPERVAC



YOUR DEWALT ARSENAL JUST GREW
INTRODUCING SUPER VAC'S NEWEST BATTERY PPV




SUPERVAC  **DEWALT**

TWO NAMES YOU CAN TRUST

IN ONE BATTERY FAN

Never in firefighter history has one battery fan worked together with your department's other DeWalt battery-operated tools. Introducing the all-new Super Vac 18" variable-speed battery fan, equipped with dual DeWalt FLEXVOLT® batteries, making this rugged yet compact fan the most swappable PPV interfaces on the market. Finally, the industry can turn to a fan with a trusted battery name that pairs with 180+ products, including our fan and Super Vac's dependable history.

**PATENT
PENDING**

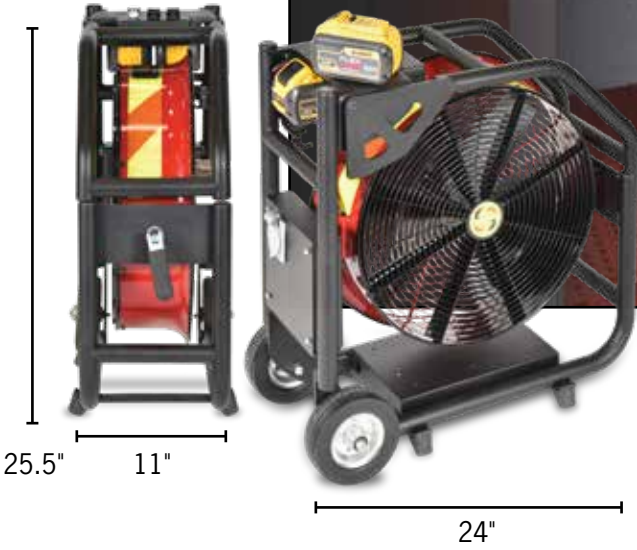


**COMPACT
FEATURING A NARROW DESIGN**

180° OF SEPARATION

At Super Vac, we have all the angles of attack covered — and then some. You won't find another battery fan that offers 180 degrees of tilt like the ever-versatile V18-BD. Just this one feature truly sets this battery fan apart from the others.

**ONLY 46 LBS.
AND STILL, SUPER VAC TOUGH**

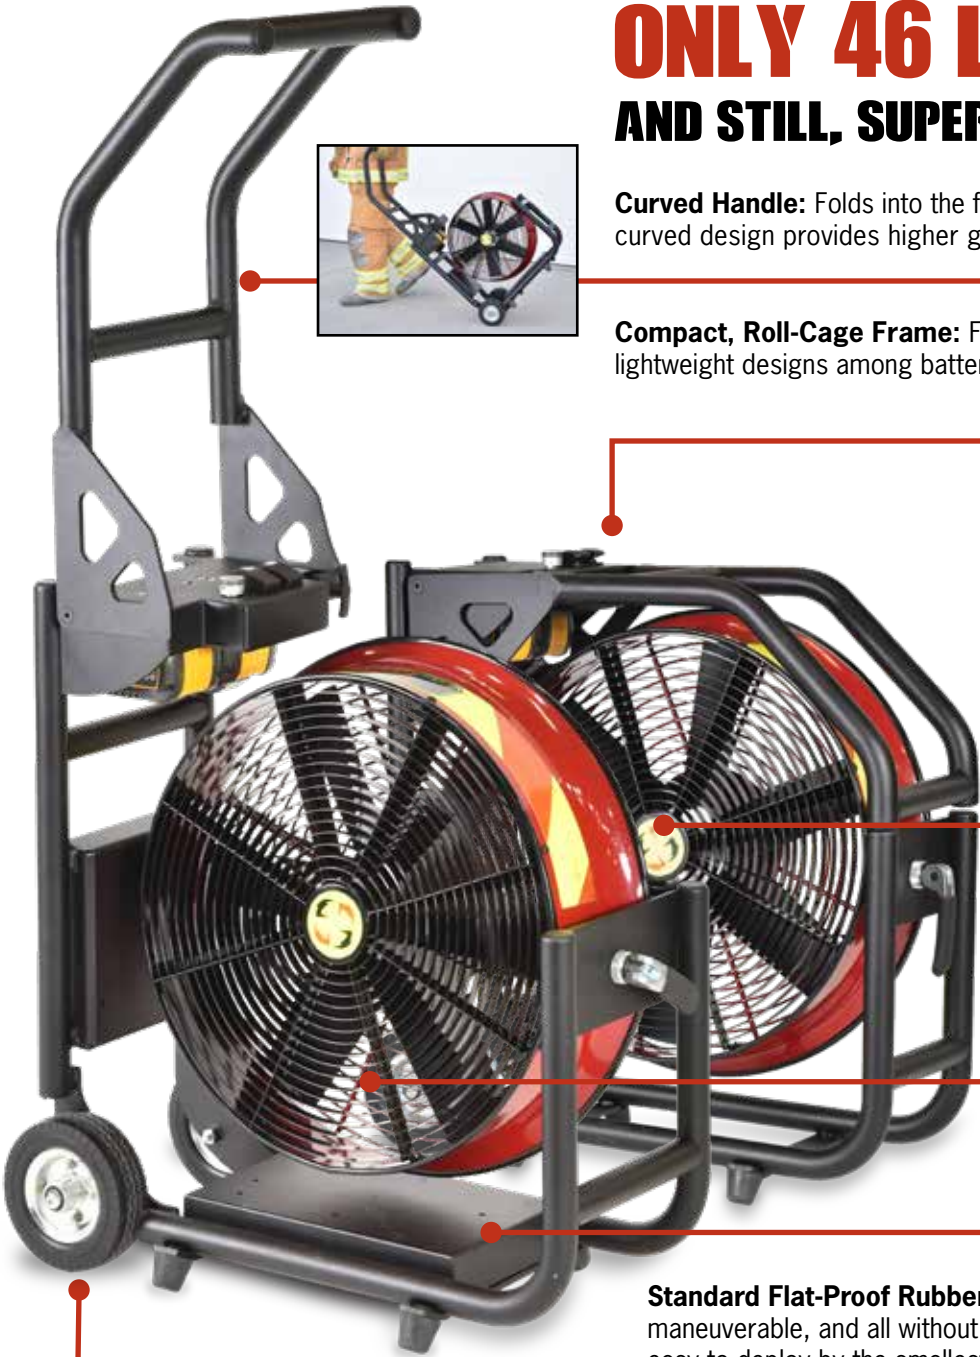

Curved Handle: Folds into the frame for compact storage; curved design provides higher grip for better ergonomics

Compact, Roll-Cage Frame: Features one of the most compact, lightweight designs among battery PPVs with its aluminum frame design



Stream Shaper Guard: Allows for flexible setback; Air Cone Guard is available by request

Polymer Blade: Minimizes weight; Super Vac's single-piece cast aluminum blade, for use in high-radiant heat situations, is available by request

Optional Shore Power: 120-220V AC operation is available upon request.

Standard Flat-Proof Rubber Tires: Highly maneuverable, and all without lifting the fan; easy to deploy by the smallest firefighters



For attic attacks



For positive tilt attacks



Storage angle



For negative tilt attacks



For manhole attacks

THE V18-BD PPV WITH DEWALT LITHIUM ION BATTERY



UP TO 45 MINUTES OF RUN TIME*

Unlike other brands, we back our numbers with true third-party testing. The V18-BD is slated to undergo testing, in accordance with the Air Movement Control Association (AMCA publication 240). The ratings below are self measured and will be updated as AMCA data is made available.

* Run time based on battery selection


18" Blades - H x W x D: 25" x 25" x 10" - 635mm x 635mm x 254mm


**5-YEAR
WARRANTY**

| Model | Weight With Batteries | Motor |
|--------|--------------------------|------------------------------------------------------|
| V18-BD | 46 lbs 21 kg | SL120 Variable-Speed DC with Optional 120-220V AC |



Battery Options

| Standard Battery | Run Time At Max Airflow | Setback For Output Rating | Angle For Output Rating | Output |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------|----------------------------|-------------------------|
|  DeWalt FLEXVOLT 9.0Ah (2) (Compatible with all DeWalt 20/60/120V MAX Tools) | 35 minutes (With built-in battery gauge) | 9 ft 2.7m | 10° | 9,650 cfm 16,395 chm |

| Optional Battery | Run Time At Max Airflow | Setback For Output Rating | Angle For Output Rating | Output |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------|----------------------------|-------------------------|
|  DeWalt FLEXVOLT 12.0Ah (2) (Compatible with all DeWalt 20/60/120V MAX Tools) | 45 minutes (With built-in battery gauge) | 9 ft 2.7m | 10° | 9,650 cfm 16,395 chm |

*Up to 45 minutes run time, depending on battery selection. 120V MAX is based on using 2 DEWALT 60V MAX*lithium-ion batteries combined. Optional 120-220V AC operation is available upon request.

Available Accessories DeWalt FLEXVOLT Batteries, Chargers, Duct, Carry Strap and Mountain Mister